

REV: DATE: B AUG 17, 2006

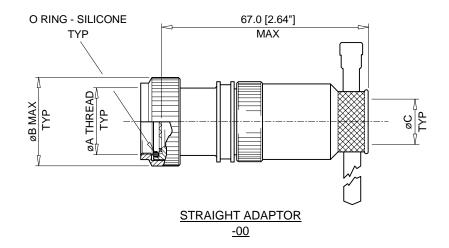

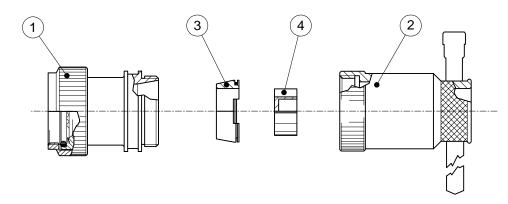

© 2006 Tyco Electronics Corporation. All rights reserved.

Raychem Wire and **HEXASHIELD ADAPTOR FOR tyco**/Electronics Harnessing Products **CODE 40 CONNECTORS-**300 Constitution Drive **EXTENDED BODY AND** Menlo Park, CA 94025 USA **BANDSTRAP CLAMPING NUT** Wire and Harnessing Products UNLESS OTHERWISE SPECIFIED This drawing and the information set forth hereon is the DOCUMENT NO. property of Tyco Electronics and is to be held in trust and confidence. Publication, duplication, disclosure or use for DIMENSIONS ARE IN MILLIMETERS. HEX40L-AY-00-YY-AYY-3-YY any other purpose not expressly authorized in writing by INCH DIMENSIONS ARE SHOWN IN Tyco Electronics is prohibited. **BRACKETS** SHEET: Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the FILE-UK: File & DCR# SCALE: DRAWN: DATE: NONE 1 OF 4 CRJ MAR 00 Hex40L-3scd-us D060248 product for their application.

REV: DATE: B AUG 17, 2006

KIT DESCRIPTION

ITEM	DESCRIPTION	MATERIAL
1	BODY ASSEMBLY	ALUMINIUM ALLOY
2	CLAMPING NUT ASSEMBLY – BANDSTRAP	ALUMINIUM ALLOY/STAINLESS STEEL
3	CONIC RING	ALUMINIUM ALLOY
4	STAR	ALUMINIUM ALLOY


TABLE OF DIMENSIONS

Order Number	Shell Size		ØA Thread Class 6H	ØB Max	ØC ±0.10	Ferrule Quantity	
	Mil.	Com.			[±.004"]	Std.	Opt.
09	Α	09	M12 x 1	19.0 [0.75"]	8.00 [0.315"]	1	-
11	В	11	M15 x 1	22.0 [0.87"]	13.50 [0.531"]	2	1
13	C	13	M18 x 1	25.5 [1.00"]	15.00 [0.591"]	3	1
15	D	15	M22 x 1	30.5 [1.20"]	18.00 [0.709"]	5	1
17	Е	17	M25 x 1	33.5 [1.32"]	21.00 [0.827"]	6	7
19	F	19	M28 x 1	37.0 [1.46"]	24.00 [0.945"]	7	-
21	G	21	M31 x 1	38.5 [1.52"]	27.00 [1.063"]	9	11
23	H	23	M34 x 1	42.0 [1.65"]	30.00 [1.181"]	10	13
25	J	25	M37 x 1	46.5 [1.83"]	33.00 [1.299"]	12	17

THEO / Electronics Wire and Harnessing Products			Raychem Wire and Harnessing Products 300 Constitution Drive Menlo Park, CA 94025 USA	HEXASHIELD ADAPTOR FOR CODE 40 CONNECTORS- EXTENDED BODY AND BANDSTRAP CLAMPING NUT				
DIMENSIONS ARE IN property of Tyco Electronic confidence. Publication			information set forth hereon is the tronics and is to be held in trust and on, duplication, disclosure or use for t expressly authorized in writing by ohibited.	DOCUMENT NO. HEX40L-	-AY-00-Y	Y-AYY-	3-YY	
DRAWN: CRJ	DATE: MAR 00	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		FILE-UK: Hex40L-3scd-us	File & DCR# D060248	SCALE: NONE	SHEET: 2 OF 4	

REV: DATE: B AUG 17, 2006

PART NUMBERING

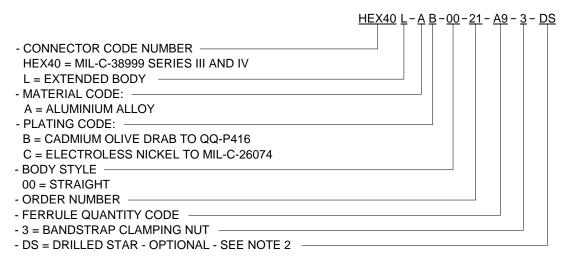


APPLICATION

- These adaptors are designed to be mounted on the following connectors:

MIL-C-38999 Series III and IV

- They are qualified to the Raychem specification RB-114, when installed on metallic Mil-Specification circular connectors only.
- They are designed primarily for open wire bundle installation having an overall braid, but are also designed to accept Raychem heat shrink moulded parts where strain relief is required see illustration.

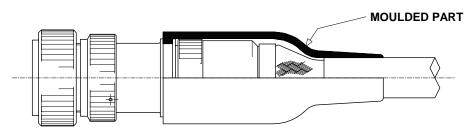

- Use in conjunction with the ferrules HET-A-0XX, which are purchased separately. Refer to HET-A-0XX S.C.D. for relevant selection details.

INSTALLATION

- See Installation Procedure RPIP-696-04.

PACKAGING


- All components are supplied in a plastic bag.

TUEE / Electronics Wire and Harnessing Products			Raychem Wire and Harnessing Products 300 Constitution Drive Menlo Park, CA 94025 USA	FOR S- D NUT			
DIMENSIONS ARE IN property of Tyco Electronic confidence. Publication			information set forth hereon is the tronics and is to be held in trust and on, duplication, disclosure or use for t expressly authorized in writing by ohibited.	HEX40L-	AY-00-Y	Y-AYY-	3-YY
DRAWN: CRJ	DATE: MAR 00	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		FILE-UK: Hex40L-3scd-us	File & DCR# D060248	SCALE: NONE	SHEET: 3 OF 4

REV: DATE: B AUG 17, 2006

NOTES!

- 1. Item 4 Star is **not** supplied with Hexashield Order Number 09.
- 2. The DS option, illustrated below, is for a Drilled Star that is available on sizes 15 to 25 only. This option is to allow unshielded wires to pass through the assembly.




STAR SIZE	15	17	19	21	23	25
ØD MAX	3.0	6.0	9.0	12.0	15.0	18.0
	[0.12"]	[0.24"]	[0.35"]	[0.47"]	[0.59"]	[0.71"]

3. Where the ferrule quantities required are standard, the item 4 - Star - is also standard. If the optional quantity is selected then 2 items 4 will be supplied - one "split" and the other one standard. See below for illustration.

EXAMPLE: FERRULE QUANTITY CODE -A13

-A13 = -A10 SPLIT STAR + -A3 STANDARD STAR



 Assembly is to be permanently marked with Code Identity Number and Part Number. (e.g. 06090 HEX40L-AB-00-21-A9-3)

tyco/	Electronics
-------	-------------

Wire and Harnessing Products

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCH DIMENSIONS ARE SHOWN IN

BRACKETS

DRAWN: DATE:
CRJ MAR 00

Raychem Wire and Harnessing Products 300 Constitution Drive Menlo Park, CA 94025 USA

This drawing and the information set forth hereon is the property of Tyco Electronics and is to be held in trust and confidence. Publication, duplication, disclosure or use for any other purpose not expressly authorized in writing by Tyco Electronics is prohibited.

Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.

TITLE:

HEXASHIELD ADAPTOR FOR CODE 40 CONNECTORS-EXTENDED BODY AND BANDSTRAP CLAMPING NUT

DOCUMENT NO.

HEX40L-AY-00-YY-AYY-3-YY

FILE-UK: File & DCR# SCALE: SHEET: Hex40L-3scd-us D060248 NONE 4 OF 4